



MANIFOLD

Features:

- **Versatile** - Fits 1" or 3/4" male tank fittings
- **No lead brass** - 0.05% or less
- Tapped with (2) 1", (2) 3/4" and (1) 1/4" threads
- Inlet and outlet tapped 1" female X 1-1/4" male




Part Number	Weight	Price
952280	2.4#	\$53.66

CONSTANT PRESSURE MANIFOLD PACKAGE

Package consists of:


- A-** (1) 2-1/2" Stainless Steel Back Mounted Liquid Filled Gauge 0-100#
- B-** (1) Spring loaded Pressure Relief Valve, set at 100 PSI at the factory
- C-** (1) Steel mounting bracket
- D-** (1) Chrome plated sample valve or no lead brass hose bibb
- E-** (1) 1" X 1/2" and (1) 1/2" X 1/4" Nylon bushing for transducer connection. Reduces potential electrical interference, thus providing greater transducer accuracy
- F-** (1) 1" X 3/4" Brass Tank Adapter Bushing

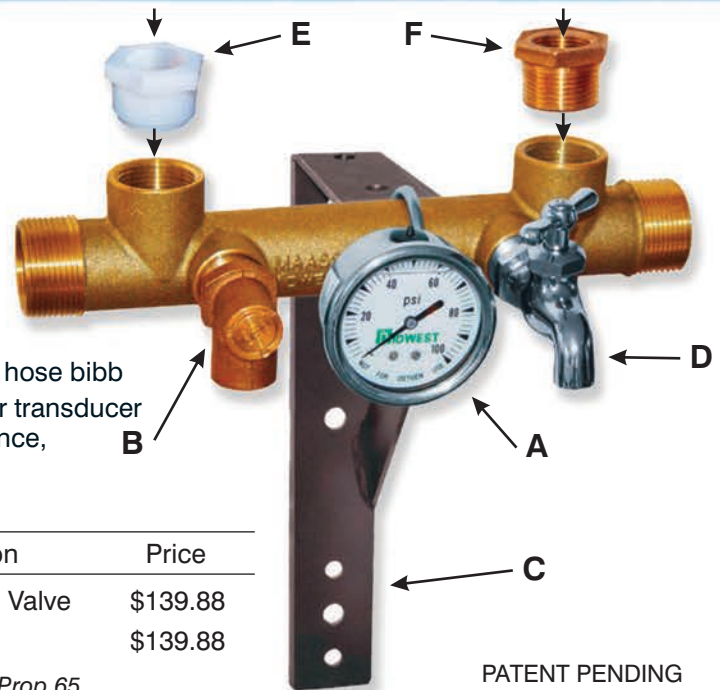

Part Number	Weight	Optional Connection	Price
952300	5.30#	Chrome Plated Sample Valve	\$139.88
952302	5.30#	Brass Hose Hub	\$139.88

Note: Not all components meet California Prop 65

PATENT PENDING

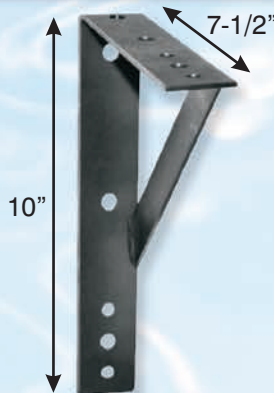

WALL MOUNT BRACKET

Mount manifold, tank and fittings on wall for:

- Neat appearance
- Easy service
- Includes steel U bolt for mounting
- Off floor for system protection

Bracket is steel construction. Will accept 3/8" bolts for mounting. Versatile Tank Discharge Center may be positioned 7-1/2" or 10" from wall.

Part Number	Weight	Price
952290	1.2#	\$36.26

U.S. FUNDS

MEMBER:

